

ENVIRONMENTAL PRODUCT DECLARATION

# FORMAWALL DIMENSION SERIES INSULATED METAL PANELS

WALL IMP SYSTEMS



CENTRIA offers factory formed wall and roof cladding and panel systems for architectural and industrial applications along with field assembled metal panels, and architectural and engineering support services. For 100 years, the continuous pursuit of innovation and excellence has been synonymous to CENTRIA and its predecessor companies H.H. Robertson, E.G. Smith and Steelite. CENTRIA strives to offer sustainable, eco-friendly metal wall and roof systems.

Learn more at [www.centria.com](http://www.centria.com)



# ENVIRONMENTAL PRODUCT DECLARATION



**Formawall Dimension Series  
Insulated Metal Panels**  
Product-Specific EPD

**According to ISO 14025,  
EN 15804, and ISO 21930:2017**

|   |   |  |
|---|---|--|
| EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE | UL Environment 333 Pfingsten Road Northbrook, IL 60611  | <a href="https://www.ul.com/">https://www.ul.com/</a><br><a href="https://spot.ul.com">https://spot.ul.com</a> |
| GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER                   | General Program Instructions v.2.4 July 2018  |  |
| MANUFACTURER NAME AND ADDRESS                                     | CENTRIA<br>1550 Coraopolis Heights Road Suite 500<br>Moon Township, PA 15108  |  |
| DECLARATION NUMBER  | 4788736474.101.1  |  |
| DECLARED PRODUCT & FUNCTIONAL UNIT OR DECLARED UNIT               | Formawall Dimension Series Insulated Metal Panels Wall IMP Systems; 100m <sup>2</sup>   |  |
| REFERENCE PCR AND VERSION NUMBER                                  | Part B: Insulated Metal Panels, Metal Composite Panels, and Metal Cladding: Roof and Wall Panels, v2.0, UL 10010-5 [UL Environment]   |  |
| DESCRIPTION OF PRODUCT APPLICATION/USE                            | Comprised of a polyisocyanurate core sandwiched between two pre-finished steel sheets which form a single, all-in-one insulated metal panel used as exterior wall and roof cladding systems, interior ceiling, and partition walls. |  |
| PRODUCT RSL DESCRIPTION (IF APPL.)                                | N/A   |  |
| MARKETS OF APPLICABILITY  | North America   |  |
| DATE OF ISSUE   | October 1, 2020   |  |
| PERIOD OF VALIDITY  | 5 Years   |  |
| EPD TYPE  | Product-Specific  |  |
| RANGE OF DATASET VARIABILITY                                      | N/A   |  |
| EPD SCOPE   | Cradle to gate  |  |
| YEAR(S) OF REPORTED PRIMARY DATA                                  | 2018  |  |
| LCA SOFTWARE & VERSION NUMBER                                     | GaBi ts, 9  |  |
| LCI DATABASE(S) & VERSION NUMBER                                  | GaBi 2019 (service pack 39)   |  |
| LCIA METHODOLOGY & VERSION NUMBER                                 | TRACI 2.1   |  |

|   |  |
|---|--|
| This PCR review was conducted by:   | UL Environment   |
|   | PCR Review Panel   |
|   | <a href="mailto:epd@ulenvironment.com">epd@ulenvironment.com</a> |
| This declaration was independently verified in accordance with ISO 14025: 2006.<br><input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL | <i>Grant R. Martin</i>   |
|   | Grant R. Martin, UL Environment                                  |
| This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:  | <i>Thomas P. Gloria</i>  |
|   | Thomas P. Gloria, Industrial Ecology Consultants                 |

## LIMITATIONS

**Exclusions:** EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

**Accuracy of Results:** EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact.

**Comparability:** EPDs from different programs may not be comparable. Full conformance with a PCR allows EPD comparability only when all stages of a life cycle have been considered. However, variations and deviations are possible\*. Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.



Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804, and ISO 21930:2017

## 1. EPD Content

### 1.1. Description of Company/Organization

CENTRIA is a recognized leader in the advancement of building cladding, panel, and façade technology, serving the architectural, commercial, and industrial industries with energy efficient and cost-effective cladding and insulated metal wall and roof panels. Aware of the increasing interest in transparent reporting of products’ environmental performance, CENTRIA seeks to demonstrate their sustainability leadership and leverage business value through evaluating the environmental profile of insulated metal panels (IMPs) and cladding and communicating the results via environmental product declarations (EPDs).

### 1.2. Product Description

Insulated metal panels in their simplest form are rigid foam sandwiched between two sheets of coated metal. Steel panel facings create a vapor, air, and moisture barrier and provide long-term thermal stability. The panels are produced in a variety of styles and sizes depending on application. Panels are then cut to length, packaged, and distributed to construction sites.

CENTRIA products are used in a multitude of building coverage applications and offer a wide range of benefits, including aesthetics, durability, rain screening, fireproofing, and reduced energy costs, with each product type offering its own unique properties.

This EPD focuses on the Formawall Dimension Series (non-profiled and profiled) IMP products as seen in Table 1. A flow diagram depicting the manufacturing process can be found in Figure 3.

**Table 1: Panel products under study**

| NAME                    | FORMAWALL – NON-PROFILED | FORMAWALL – PROFILED |
|-------------------------|--------------------------|----------------------|
| Weight [lbs. / sq. ft.] | 2.4 – 4.4                | 3.5 – 4.4            |
| Sheet metal gauge       | 20 – 26 ga.              | 20 – 26 ga.          |

Manufacturing information for the aforementioned products was supplied by the CENTRIA facility in Sheridan, AR.

### 1.3. Application

CENTRIA’s commercial & industrial insulated metal panels deliver the industry’s best combination of aesthetics, performance, sustainability and value. These lightweight panels provide tremendous flexibility with long lengths, various finish options and superior weather resistance, as well as horizontal and vertical installation capability. These panels are the ideal product to create a modern aesthetic for large-scale buildings like warehouses, industrial facilities, schools and shopping centers.





Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD



According to ISO 14025,  
EN 15804 and ISO 21930:2017

1.4. Declaration of Methodological Framework

The production stage (i.e., cradle-to-gate), including raw material extraction and processing, processing of secondary material, transport to the manufacturer, and manufacturing, is required by the PCR. The PCR considers installation, use, end-of-life, and recovery stages (modules A4 through D) as optional. As such, this study excludes the optional stages. Since this is a “cradle-to-gate” study, the products are not declared as fulfilling a building reference service life. This study also excludes construction of capital equipment, including tools used to produce, install and maintain the products; maintenance and operation of support equipment; human labor and commute; building energy consumption; and all other impacts associated with the use stage relative to energy use for the building in which the product is installed. The included and excluded life cycle stages are summarized in Table 2.

Table 2: Life cycle modules included in EPD

| Production  |                           |               | Installation               |                            | Use stage         |             |        |             |               |                        |                       | End-of-Life                 |                  |   |          | Next product system                    |
|---|---------------------------|---------------|----------------------------|----------------------------|-------------------|-------------|--------|-------------|---------------|------------------------|-----------------------|-----------------------------|------------------|---|----------|--|
| Raw material supply (extraction, processing, recycled material) | Transport to manufacturer | Manufacturing | Transport to building site | Installation into building | Use / application | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstruction / demolition | Transport to EoL | Waste processing for reuse, recovery or recycling | Disposal | Reuse, recovery or recycling potential |
| A1  | A2                        | A3            | A4                         | A5                         | B1                | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                          | C2               | C3  | C4       | D                                      |
| X   | X                         | X             | MND                        | MND                        | MND               | MND         | MND    | MND         | MND           | MND                    | MND                   | MND                         | MND              | MND   | MND      | MND                                    |

X = declared module; MND = module not declared

1.5. Technical Data

Substrate Performance

AISI S100 North American Specification for the Design of Cold-Formed Steel Structural Members

ASTM A653 Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

ASTM A792 Standard Specification for Steel Sheet, 55 % Aluminum-Zinc Alloy-Coated by the Hot-Dip Process





Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804 and ISO 21930:2017

|                                 |   |
|---------------------------------|---|
| ASTM A924                       | Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process   |
| <b>Metal Wall Performance</b>   |   |
| ASTM C1363                      | Standard Test Method for Thermal Performance of Building Materials and Envelope Assemblies by Means of a Hot Box Apparatus                                  |
| ASTM E72                        | Standard Test Methods of Conducting Strength Tests of Panels for Building Construction  |
| ASTM E90                        | Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements                                     |
| ASTM E283                       | Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the |
| ASTM E330                       | Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference           |
| ASTM E331                       | Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference               |
| FM 4481                         | FM Global Approval Standard for Class 1 Exterior Wall Systems   |
| <b>Paint Finish Performance</b> |   |
| ASTM B117                       | Standard Practice for Operating Salt Spray (Fog) Apparatus  |
| ASTM D523                       | Standard Test Method for Specular Gloss   |
| ASTM D968                       | Standard Test Methods for Abrasion Resistance of Organic Coatings by Falling Abrasive   |
| ASTM D2244                      | Standard Practice for Calculation of Color Tolerances and Color Differences from Instrumentally Measured Color Coordinates                                  |
| ASTM D2247                      | Standard Practice for Testing Water Resistance of Coatings in 100% Relative Humidity  |
| ASTM D2794                      | Standard Test Method for Resistance of Organic Coatings to the Effects of Rapid Deformation (Impact)  |





Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804 and ISO 21930:2017

ASTM D4214 Standard Test Methods for Evaluating the Degree of Chalking of Exterior Paint Films

### Fire Performance

ASTM E84 Standard Test Method for Surface Burning Characteristics of Building Materials

ASTM E119 Standard Test Methods for Fire Tests of Building Construction and Materials

FM 4480 FM Global Approval Standard for Class 1 Fire Rating of Building Panels or Interior Finish Materials

FM 4482 FM Global Approval Standard for Class 1 Interior Wall and Ceiling Materials or Systems for Smoke Sensitive Occupancies

NFPA 259 Standard Test Method for Potential Heat of Building Materials

NFPA 268 Standard Test Method for Determining Ignitability of Exterior Wall Assemblies Using a Radiant Heat Energy Source

NFPA 285 Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Wall Assemblies Containing Combustible Components

### Model Codes or Standards

International Building Code

Local Building Code

ASCE/SEI 7 – Minimum Design Loads for Buildings and Other Structures

UL-Building Materials Directory

UL- Fire Resistance Directory

ASHRAE, TIMA –[Handbook of Fundamentals & Insulation Requirements]

SMACNA, [Architectural Sheet Metal Manual – Gutter design and flashing details]

FS HH-I-1972)-([Insulation Board Thermal Faced, Polyurethane or Polyisocyanurate])

FMRC-Approval Guide

FMRC-Specification Tested Products Guide

ANSI B18.6.4 –[Steel Self-Tapping Screw Standard]

SAE J78 Self Drilling Tapping Screws

MCA Technical Bulletin, Fastener Selection Guidelines, 2008

AAMA 501-[Method of Test for Metal Curtain Walls]





Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 1.6. Properties of Declared Product as Delivered

Formawall IMPs come in a variety of sizes and configurations customized to each project's requirements. Technical properties of the Formawall products under study can be seen in Table 3.

**Table 3: Formawall properties**

| PARAMETER | UNIT          | FORMAWALL<br>NON-PROFILED | FORMAWALL<br>PROFILED |
|-----------|---------------|---------------------------|-----------------------|
| Thickness | inch          | 2 – 3"                    | 2 – 3"                |
| Length    | feet          | 4 – 37'                   | 4 – 37'               |
| Width     | inch          | 10 – 40"                  | 10 – 40"              |
| Weight    | lb. / sq. ft. | 2.4 – 4.4                 | 3.5 – 4.4             |

## 1.7. Material Composition

The main components that make up the Formawall product are show below in Table 4.

**Table 4: Formawall (non-profiled and profiled) material composition**

| MATERIAL                              | % COMPOSITION |
|---------------------------------------|---------------|
| Steel coil                            | 78%           |
| Methylene diphenyl diisocyanate (MDI) | 14%           |
| Polyester polyol                      | 6%            |
| Sealant and adhesive                  | 1%            |
| Blowing agent                         | 1%            |
| Preblended foam                       | <1%           |

Steel coil represents steel that has been rolled out into sheets (20 through 26 gauge) and hot-dipped galvanized.

Polyester polyol is one of the primary components of polyisocyanurate and is typically produced by polymerizing propylene oxide and ethylene oxide.

Methylene diphenyl diisocyanate (MDI) is another primary component of polyisocyanurate.

Blowing agent is an inert gas to facilitate the formation of foam. A blend of cyclopentane and isopentane is used as blowing agent.

Catalysts are used to balance the reaction between polyester polyol and MDI that produces polyisocyanurate.





Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804 and ISO 21930:2017

1.8. Manufacturing

IMPs consist of a polyisocyanurate foam core sandwiched between two sheets of steel. These panels are manufactured on a continuous production line. In IMP production, foam chemicals are mixed and injected in-line between the two steel sheets; preblended foam is also used in CENTRIA's operations. CENTRIA uses a blend of cyclopentane and isopentane as a blowing agent. Emissions mainly occur during foam injection between metal sheets. Blowing agent loss rate during manufacturing is estimated as 5% of received material. Foam scrap sent to landfill is assumed to emit 50% of the blowing agent entrapped within the material.

Once the foam has cured, panels are cut to length, packaged, and distributed to construction sites. All finished cladding products are packaged in custom built wooden crates, along with a variety of protective materials, including expanded polystyrene, corrugate, oriented strand board, paper, and plastic film shrink wrap.

Ancillary materials, such as lubricants and sealants, were also used to facilitate operations. Utilities including municipal water, electricity, natural gas, and propane were also used on site at manufacturing facilities. Materials used during installation and manufactured by CENTRIA, such as clips, fasteners, and flashing, were included in this study.

Figure 3 shows a cradle-to-gate flow diagram of IMP production.

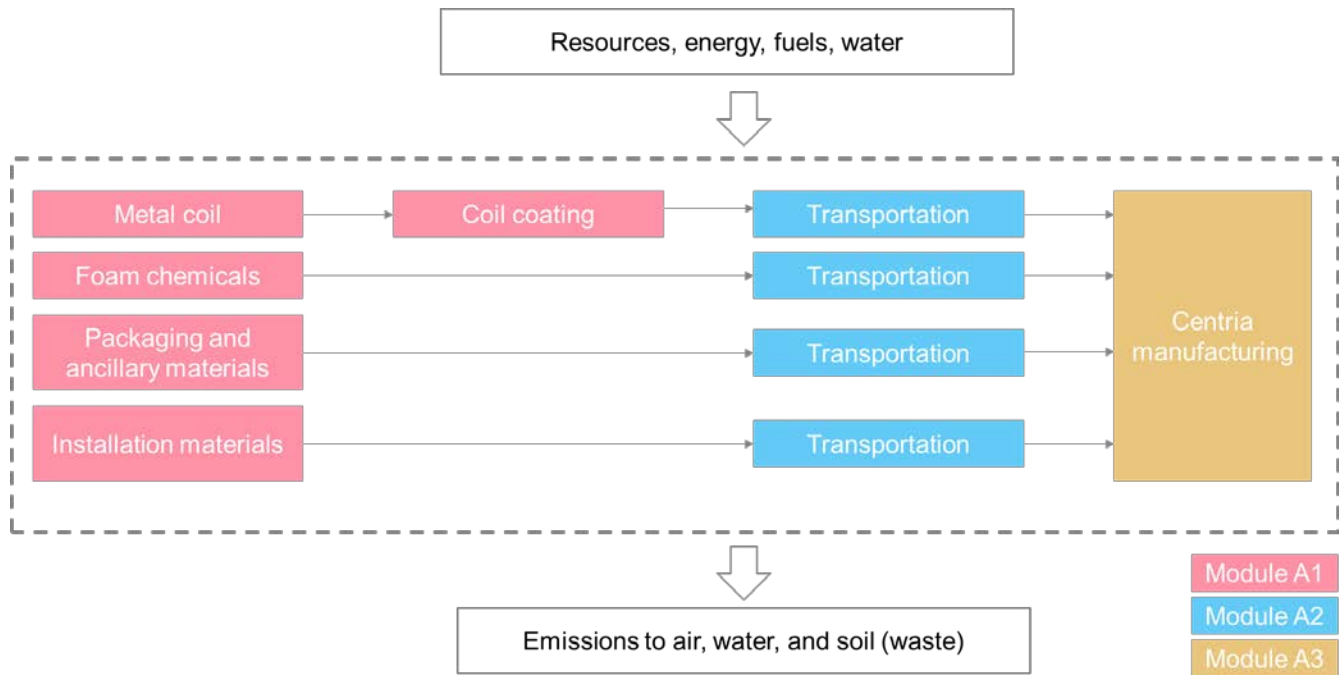


Figure 1: IMP cradle-to-gate flow diagram

IMPs are offered in a variety of profiles and sizes depending on the need of the project, as seen in Figure 4.







Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804 and ISO 21930:2017



Figure 2: Examples of Formawall Dimension Series non-profiled (left) and profiled DS60 (right) IMP products

## 1.9. Packaging

---

IMP products are packaged in custom built crates, constructed with lumber and plywood. Packaging materials also include plastic stretch film, paper, cardboard, and expanded polystyrene (EPS).

## 1.10. Transportation

---

Average transportation distances and modes of transport are used to model the transport of the raw materials, operating materials, and auxiliary materials to the Sheridan production facilities.

## 2. Life Cycle Assessment Background Information

---

### 2.1. Functional Unit

---

The main purpose of IMPs is to provide thermal insulation and weather protection for building walls and roofs. The panels create barriers that control noise, water, air, and thermal transmission between an external environment and interior building space. Accordingly, the PCR's declared unit for metal panels is the coverage of 100 square meters (1076.4 square feet) of building area. The coverage area refers to the projected flat area covered by the product as output by the final manufacturing process step and does not account for losses due to overlap and scrap during installation.





Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804 and ISO 21930:2017

Table 5: Reference flows

| NAME                                     | FORMAWALL –<br>NON-PROFILED | FORMAWALL<br>–PROFILED |
|--|-----------------------------|------------------------|
| Declared unit [m <sup>2</sup> ]          | 100                         | 100                    |
| Product mass [kg / 100 m <sup>2</sup> ]* | 1,653                       | 1,726                  |

\*Product mass includes installation materials

## 2.2. System Boundary

A “cradle-to-gate” life cycle analysis was conducted. Within these boundaries, only the product stage (A1 – A3)—raw material supply, inbound transport of raw materials to manufacturing facility, manufacturing—is considered. The construction stage (A4 – A5), building use stage (B1 - B7), and end-of-life stage (C1 - C4) were not assessed, nor were the construction and maintenance of capital equipment (e.g., production equipment). Additionally, human labor and employee commute were not included in the analysis.

## 2.3. Estimates and Assumptions

This study was based on primary data collected at the CENTRIA Sheridan, AR facility. Datasets selected to represent the production of raw materials by upstream suppliers are based on regional or global averages rather than on primary data collected directly from CENTRIA supply chains. When selecting these datasets, a conservative approach was applied in that datasets associated with higher impacts were used when there were multiple possible options. However, these choices were not shown to significantly affect results.

Secondly, this study was conducted in accordance with a PCR. While this guidance document has been developed by industry experts to best represent this product system, real life environmental impacts of aluminum cladding products may extend beyond those defined in this document.

This study assumes that 5% of blowing agent used in the IMP production process are emitted during manufacturing. However, actual blowing agent releases may vary and additional releases may take place during subsequent life cycle stages.

## 2.4. Cut-off Criteria

Data were included whenever possible. If it was necessary to exclude materials in order to facilitate the analysis, only flows representing less than 1% of the cumulative mass of the product system were excluded, providing their environmental relevance was judged not to be a concern.

Packaging of incoming raw materials (e.g. pallets) are excluded as they represent less than 1% of the product mass and are not environmentally relevant. Capital goods and infrastructure required to produce metal panel and cladding products are presumed to produce millions of units to over the course of their life, so impact of a single functional unit attributed to this equipment is negligible; therefore, capital goods and infrastructure were excluded from this study.

## 2.5. Data Sources

As a general rule, specific data derived from specific production processes or average data derived from specific production processes shall be the first choice as a basis for calculating LCA results.





Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804 and ISO 21930:2017

For life cycle modeling of the considered products, the GaBi Software System for Life Cycle Engineering, developed by Sphera, was used. All relevant background datasets were taken from the GaBi 2019 software database (service pack 39). The datasets from the GaBi database are documented in the online documentation (Sphera, 2019).

## 2.6. Data Quality

---

A variety of tests and checks were performed throughout the project to ensure high quality of the completed LCA. Checks included an extensive review of project-specific LCA models as well as the background data used.

### Temporal Coverage

All of the primary data is taken from 12 months of continuous operation in the 2018 fiscal year. All secondary data were obtained from the GaBi 2019 databases and published EPDs. Data are representative of the years 2010 to 2018

### Geographical Coverage

All primary and secondary data were collected specific to the countries or regions under study. Where country-specific or region-specific data were unavailable, proxy data were used. In the case of steel coil, a dataset representative of global production was used.

### Technological Coverage

All primary and secondary data were modeled to be specific to the technologies or technology mixes under study. Where technology-specific data were unavailable, proxy data were used.

## 2.7. Reference Period

---

CENTRIA provided annual data for 2018.

## 2.8. Allocation

---

Since only facility level data were available, input and output flows were allocated among the facility's co-products to determine the flows associated with the products analyzed. Allocation of materials was done on a mass-basis as appropriate.

End-of-life allocation generally follows the requirements of ISO 14044, section 4.3.4.3 and the product category rule. (UL Environment, 2018). Under the PCR, the product life cycle is modeled using the cut-off approach. Scrap inputs to manufacturing are reported under the secondary materials metric.

Processing and recycling of the net amount of scrap leaving the system (i.e., scrap outputs minus secondary material inputs) is not included in this study.

## 2.9. Comparability

---

No comparisons or benchmarking is included in this EPD. LCA results across EPDs can be calculated with different background databases, modeling assumptions, geographic scope and time periods, all of which are valid and acceptable according to the Product Category Rules (PCR) and ISO standards. Caution should be used when





Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804 and ISO 21930:2017

attempting to compare EPD results.

### 3. Scenarios and Additional Technical Information

This EPD represents a cradle-to-gate analysis; as such, no additional information is provided as the downstream modules are not declared.

### 4. Life Cycle Assessment Results

Cradle-to-gate life cycle impact assessment results are shown for TRACI 2.1 characterization factors. These results are relative expressions and do not predict impacts on category endpoints such as human health or ecosystem quality, the exceeding of thresholds, safety margins, or risks.

With respect to global warming potential, biogenic carbon is not considered as the declared products only use biogenic materials for packaging. For packaging, no credit was given for the sequestration of biogenic carbon during the growth of plants used in plant-derived packaging materials. Since the lifetime of plant-derived packaging materials is shorter than the 100 year time horizon of this impact category (GWP 100), GWP including biogenic carbon is not reported. Table 5 through Table 7 provide descriptions of the environmental metric acronyms.

**Table 6: Impact assessment results**

| ACRONYM | NAME                                 | TRACI 2.1 UNIT           |
|---------|--------------------------------------|--------------------------|
| GWP     | Global Warming Potential             | [kg CO <sub>2</sub> eq.] |
| ODP     | Ozone Depletion Potential            | [kg CFC-11 eq.]          |
| AP      | Acidification Potential              | [kg SO <sub>2</sub> eq.] |
| EP      | Eutrophication Potential             | [kg N eq.]               |
| SFP     | Smog Formation Potential             | [kg O <sub>3</sub> eq.]  |
| ADPF    | Abiotic Depletion Potential - Fossil | [MJ, LHV]                |

**Table 7: LCI Results: Resource Use**

| ACRONYM | NAME   | UNIT              |
|---------|--|-------------------|
| RPRE    | Renewable primary energy as energy carrier                 | [MJ, LHV]         |
| RPRM    | Renewable primary energy resources as material utilization | [MJ, LHV]         |
| RPRT    | Total use of renewable primary energy resources            | [MJ, LHV]         |
| NRPRE   | Non-renewable primary energy as energy carrier             | [MJ, LHV]         |
| NRPRM   | Non-renewable primary energy as material-utilization       | [MJ, LHV]         |
| NRPRT   | Total use of non-renewable primary energy resources        | [MJ, LHV]         |
| SM      | Use of secondary material                                  | [kg]              |
| RSF     | Use of renewable secondary fuels                           | [MJ, LHV]         |
| NRSF    | Use of non-renewable secondary fuels                       | [MJ, LHV]         |
| RE      | Recovered energy   | [MJ, LHV]         |
| FW      | Use of fresh water   | [m <sup>3</sup> ] |





Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD



According to ISO 14025,  
EN 15804 and ISO 21930:2017

**Table 8: LCI Results: Output Flows and Waste**

| ACRONYM | NAME  | UNIT |
|---------|---|------|
| HWD     | Hazardous waste disposed  | [kg] |
| NHWD    | Non-hazardous waste disposed  | [kg] |
| HLRW    | High-level radioactive waste, condition, to final repository                    | [kg] |
| ILLRW   | Intermediate- and low-level radioactive waste, conditioned, to final repository | [kg] |
| CRU     | Components for re-use   | [kg] |
| MFR     | Materials for recycling   | [kg] |
| MER     | Materials for energy recovery   | [kg] |
| EET     | Exported energy   | [MJ] |

## 4.1. Life Cycle Impact Assessment Results

**Table 9: North American Impact Assessment Results – Formawall, non-profiled**

| PARAMETER | UNIT                     | TOTAL           | A1       | A2       | A3       |
|-----------|--------------------------|-----------------|----------|----------|----------|
| GWP       | [kg CO <sub>2</sub> eq.] | <b>7.17E+03</b> | 6.29E+03 | 2.01E+02 | 6.81E+02 |
| ODP       | [kg CFC-11 eq.]          | <b>8.78E-05</b> | 8.76E-05 | 0.00E+00 | 2.10E-07 |
| AP        | [kg SO <sub>2</sub> eq.] | <b>1.60E+01</b> | 1.37E+01 | 1.01E+00 | 1.23E+00 |
| EP        | [kg N eq.]               | <b>9.36E-01</b> | 7.78E-01 | 8.37E-02 | 7.38E-02 |
| SFP       | [kg O <sub>3</sub> eq.]  | <b>2.70E+02</b> | 2.21E+02 | 2.31E+01 | 2.62E+01 |
| ADPF      | Surplus MJ               | <b>8.91E+03</b> | 7.21E+03 | 3.95E+02 | 1.30E+03 |

**Table 10: North American Impact Assessment Results – Formawall, profiled**

| PARAMETER | UNIT                     | TOTAL           | A1       | A2       | A3       |
|-----------|--------------------------|-----------------|----------|----------|----------|
| GWP       | [kg CO <sub>2</sub> eq.] | <b>7.41E+03</b> | 6.52E+03 | 2.04E+02 | 6.81E+02 |
| ODP       | [kg CFC-11 eq.]          | <b>8.78E-05</b> | 8.76E-05 | 0.00E+00 | 2.10E-07 |
| AP        | [kg SO <sub>2</sub> eq.] | <b>1.67E+01</b> | 1.44E+01 | 1.03E+00 | 1.23E+00 |
| EP        | [kg N eq.]               | <b>9.65E-01</b> | 8.07E-01 | 8.48E-02 | 7.38E-02 |
| SFP       | [kg O <sub>3</sub> eq.]  | <b>2.80E+02</b> | 2.30E+02 | 2.34E+01 | 2.62E+01 |
| ADPF      | Surplus MJ               | <b>9.02E+03</b> | 7.31E+03 | 4.00E+02 | 1.30E+03 |





Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 4.2. Life Cycle Inventory Results

**Table 11: Resource Use – Formawall, non-profiled**

| PARAMETER | UNIT      | TOTAL    | A1       | A2       | A3       |
|-----------|-----------|----------|----------|----------|----------|
| RPRE      | [MJ, LHV] | 3.63E+03 | 2.93E+03 | 9.18E+01 | 6.06E+02 |
| RPRM      | [MJ, LHV] | 1.69E+03 | 7.09E+00 | 0.00E+00 | 1.68E+03 |
| RPRT      | [MJ, LHV] | 5.32E+03 | 2.94E+03 | 9.18E+01 | 2.29E+03 |
| NRPRE     | [MJ, LHV] | 1.04E+05 | 8.85E+04 | 2.97E+03 | 1.26E+04 |
| NRPRM     | [MJ, LHV] | 1.34E+04 | 1.28E+04 | 0.00E+00 | 6.73E+02 |
| NRPRT     | [MJ, LHV] | 1.17E+05 | 1.01E+05 | 2.97E+03 | 1.33E+04 |
| SM        | [kg]      | 9.39E+01 | 9.39E+01 | 0.00E+00 | 0.00E+00 |
| RSF       | [MJ, LHV] | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| NRSF      | [MJ, LHV] | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| RE        | [MJ, LHV] | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| FW        | [m3]      | 2.82E+01 | 2.43E+01 | 3.56E-01 | 3.56E+00 |

**Table 12: Resource Use – Formawall, profiled**

| PARAMETER | UNIT      | TOTAL    | A1       | A2       | A3       |
|-----------|-----------|----------|----------|----------|----------|
| RPRE      | [MJ, LHV] | 3.82E+03 | 3.12E+03 | 9.30E+01 | 6.06E+02 |
| RPRM      | [MJ, LHV] | 1.69E+03 | 7.09E+00 | 0.00E+00 | 1.68E+03 |
| RPRT      | [MJ, LHV] | 5.51E+03 | 3.13E+03 | 9.30E+01 | 2.29E+03 |
| NRPRE     | [MJ, LHV] | 1.07E+05 | 9.10E+04 | 3.00E+03 | 1.26E+04 |
| NRPRM     | [MJ, LHV] | 1.34E+04 | 1.28E+04 | 0.00E+00 | 6.73E+02 |
| NRPRT     | [MJ, LHV] | 1.20E+05 | 1.04E+05 | 3.00E+03 | 1.33E+04 |
| SM        | [kg]      | 9.39E+01 | 9.39E+01 | 0.00E+00 | 0.00E+00 |
| RSF       | [MJ, LHV] | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| NRSF      | [MJ, LHV] | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| RE        | [MJ, LHV] | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| FW        | [m3]      | 2.98E+01 | 2.59E+01 | 3.60E-01 | 3.56E+00 |

**Table 13: Output Flows and Waste Categories – Formawall, non-profiled**

| PARAMETER | UNIT | TOTAL    | A1       | A2       | A3       |
|-----------|------|----------|----------|----------|----------|
| HWD       | [kg] | 5.39E-03 | 5.25E-03 | 2.41E-05 | 1.20E-04 |
| NHWD      | [kg] | 1.91E+02 | 1.86E+02 | 1.12E-01 | 4.59E+00 |
| HLRW      | [kg] | 1.99E-03 | 1.08E-03 | 7.93E-06 | 9.04E-04 |
| ILLRW     | [kg] | 4.77E-02 | 2.27E-02 | 2.14E-04 | 2.48E-02 |
| CRU       | [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| MFR       | [kg] | 2.48E+01 | 0.00E+00 | 0.00E+00 | 2.48E+01 |
| MER       | [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| EET       | [MJ] | 6.46E-01 | 7.50E-03 | 0.00E+00 | 6.38E-01 |





Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804 and ISO 21930:2017

Table 14: Output Flows and Waste Categories – Formawall, profiled

| PARAMETER | UNIT | TOTAL    | A1       | A2       | A3       |
|-----------|------|----------|----------|----------|----------|
| HWD       | [kg] | 8.31E-03 | 8.16E-03 | 2.44E-05 | 1.20E-04 |
| NHWD      | [kg] | 2.00E+02 | 1.95E+02 | 1.13E-01 | 4.59E+00 |
| HLRW      | [kg] | 2.02E-03 | 1.10E-03 | 8.03E-06 | 9.04E-04 |
| ILLRW     | [kg] | 4.84E-02 | 2.34E-02 | 2.17E-04 | 2.48E-02 |
| CRU       | [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| MFR       | [kg] | 2.48E+01 | 0.00E+00 | 0.00E+00 | 2.48E+01 |
| MER       | [kg] | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| EET       | [MJ] | 6.46E-01 | 7.50E-03 | 0.00E+00 | 6.38E-01 |

## 5. LCA Interpretation

Nearly the entirety of burdens for all categories fall within module A1 (production of raw materials). Within raw materials production, the majority of impact categories are driven by the production of steel.

Though some raw materials are transported vast distances, the inbound transportation module (A2) has a modest contribution to overall impact.

Manufacturing (A3) impacts were mainly driven by utility use and had modest contribution to overall impact.

## 6. References

Bare, J. (2012). *Tool for the Reduction and Assessment of Chemical and other Environmental Impacts (TRACI) - Software Name and Version Number: TRACI version 2.1 - User’s Manual*. Washington, D.C.: U.S. EPA.

EPA. (2012). *Tool for the Reduction and Assessment of Chemical and other Environmental Impacts (TRACI) – User’s Manual*. Washington, D.C.: U.S. EPA.

IPCC. (2013). *Climate Change 2013: The Physical Science Basis*. Genf, Schweiz: IPCC.

ISO. (2006a). *ISO 14040: Environmental management – Life cycle assessment – Principles and framework*. Geneva: International Organization for Standardization.

ISO. (2006b). *ISO 14044: Environmental management – Life cycle assessment – Requirements and guidelines*. Geneva: International Organization for Standardization.

ISO. (2017). *ISO 21930: Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services*. Geneva: International Organization for Standardization.

Sphera. (2019). *GaBi LCA Database Documentation*. Retrieved from: <http://www.gabi-software.com/support/gabi/gabi-database-2020-lci-documentation/>

ISO. (2006). *ISO 14025: Environmental management – Life cycle assessment – Requirements and guidelines*. Geneva: International Organization for Standardization.



# ENVIRONMENTAL PRODUCT DECLARATION



Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD



According to ISO 14025,  
EN 15804 and ISO 21930:2017

UL Environment. (2018). *Product Category Rules for Building-Related Products and Services - Part A: Life Cycle Assessment Calculation Rules and Report Requirements, UL 10010 (v3.2)*.

UL Environment. (2018). *Product Category Rules for Part B: Insulated Metal Panels, Metal Composite Panels, and Metal Cladding: UL 10010-5 (v2.0)*.

UL Environment General Program Instructions Version 2.3, February 2018

EN 15804 +A1:2013, Sustainability of construction works--Environmental Product Declarations--Core rules for the product category of construction products.





# ENVIRONMENTAL PRODUCT DECLARATION



Formawall Dimension Series  
Insulated Metal Panels  
Product-Specific EPD

According to ISO 14025,  
EN 15804 and ISO 21930:2017

## 7. Contact Information

---

### 7.1. Study Commissioner

---



CENTRIA  
1550 Coraopolis Heights Road Suite 500  
Moon Township, PA 15108  
[www.centria.com](http://www.centria.com)

### 7.2. LCA Practitioner

---



Sphera  
170 Milk St, 3rd floor  
Boston, MA 02109  
+1 (617) 247-4477  
<http://www.sphera.com>

